



# **BATTEN LITE LED**

## LOW BAY | CANOPY | LOADING AREAS




#### **FEATURES & FUNCTIONS**

- Fully Dimmable 0-100%
- 59.000hr lifetime LM-85 B2
- IP20, IK08
- 4ft, 5ft and 6ft Options Available
- Sensor Option
- Optional Integrated 3hr maintained emergency

- Tri Colour 3000K, 4000K, 6300K
- 120° Beam Angle
- High Lumen Active LED Output
- Maintenance Free
- Environmentally Friendly
- 5 Year Warranty








The Batten Lite is an LED lighting solution that prioritizes efficiency, effectiveness, and reliabil-ity. It has been designed and engineered to maximize light output, offering a powerful and practical illumination.


This LED lighting solution requires minimal maintenance and can be seamlessly integrated with a Microwave sensor, as well as wireless controls and emergency versions.

#### **BATTEN LITE SPECIFICATION**

Product	4ft Batten Lite	5ft Batten Lite	6ft Batten Lite	
Product Code	BLITE-4-CCT-XX-XX	BLITE-5-CCT-XX-XX	BLITE-6-CCT-XX-XX	
Sensor	Yes (XX = MW)			
Emergency	Yes (XX = EM)			
Supply Voltage	220—240 VAC, PFC=0.90			
Power Rating (Circuit)	Selectable 22   40 watts	Selectable 30W   52W	Selectable 38W   63W	
Lumens	2750lm   3200lm   2750lm (22W) 5000lm   5800lm   5000lm (40W)	3750lm   4350lm   3750lm (30W) – 6500lm   7540lm   6500lm (52W)	4753lm   5510lm   4750lm (38W) – 7870lm   9130lm   7870lm (63W)	
LED Lifetime	50,000hr +			
Ingress	IP20			
Body Material	Aluminium Body, Polycarbonate Diffuser			
Operating Temperature	-20°C to +40°C Ambient			
Colour Rendering	Tri-Colour 3000K / 4000K / 6300K — CRI >80			
Dimensions LxWxH	1170mm x 60mm x 70mm	1470mm x 60mm x 70mm	1734mm x 60 x 70mm	
Weight	1.7kg	2.1kg	2.4kg	
Mounting	Ceiling Mounted			

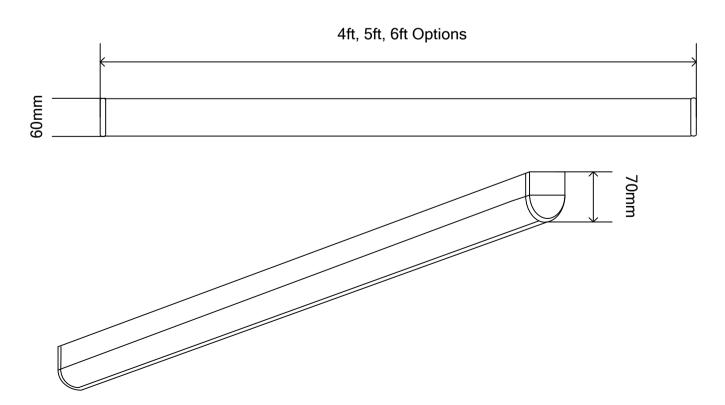

#### **Mounting Points**



### **ORDER CODES**

ORDER CODE	DESCRIPTION	LUMENS (LM)	WATTS (W)
BATTEN LITE			
BLITE4	BLITE-4FT-COLOURTEMPCHANGE	2750lm   3200lm   2750lm	22
		5000lm   5800lm   5000lm	40
BLITE5	BLITE-5FT-COLOURTEMPCHANGE	3750lm   4350lm   3750lm	30
		6500lm   7540lm   6500lm	52
BLITE6	BLITE-6FT-COLOURTEMPCHANGE	4753lm   5510lm   4750lm	38
		7870lm   9130lm   7870lm	63
SENSOR			
MW	MOTION DETECTION & DIMMING		
EMERGENCY			
EMERG	3HR EMERG KIT INTEGRATED INTO LUMINAIRE		

All products come with ceiling mounted brackets.

Please enquire for any other or bespoke requirements.

