



SKY PANEL LED

OFFICES | RETAIL | SCHOOLS | HEALTH CARE | HOSPITALITY



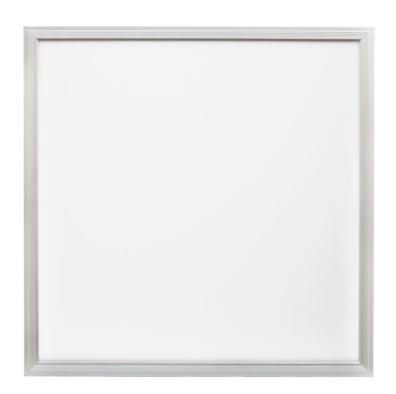





The Sky Panel is a slim line panel which can provide outstanding energy savings against traditional fluorescent fittings. Using edge lighting LED technology the Sky Panel provides 150° light distribution.

Maximise your savings further by integrating our intelligent wireless controls via a separate PIR/Occupancy switch. The ceiling mounted PIR can deliver, Daylight Harvesting, Presence Detection, Maintained Light Levels, time-Delay functions and more.

Features & Functions

- Non-dimmable or Fully Dimmable 0-100%
- Edge Lighting LED Technology
- Aluminium 4 stage powder, fire retardant
- Opaque Diffuser 150° light distribution
- Optional PIR/Occupancy Sensor

- High Lumen Active LED Output
- 50,000hr lifetime LM-80 B10
- Maintenance Free
- Environmentally Friendly
- Simple installation with plug in power supplies

Sky Panel 66
SKYP-CW-D010
100—240 VAC. PFC = 0.9*
34 Watts
4540
>50,000 hours LM-80 B10
IP44
White aluminium frame powder coated, Aluminium back
-20°C to +50°C Ambient
Convection
Day White 5300k (+/- 5%)
CE, RoHS 2011/65/EU, EMC 2014/30/EU, LVD 2014/35/EU
595 x 595 x 12
3.5kg
Ceiling Recessed, Surface mounted or Pendant

*Plug in Power Supplies. Emergency versions available—3 hour maintained, integrated into LED luminaire. Dims to 10% of original output.