

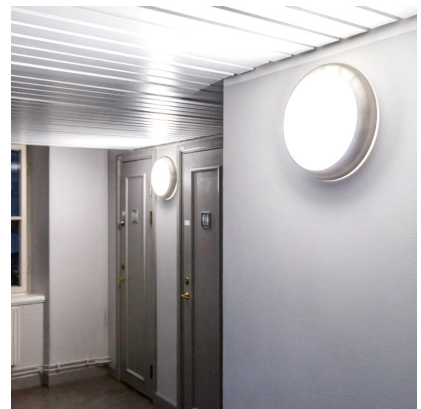


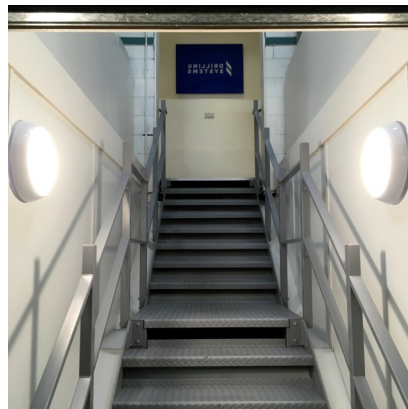

2D BULKHEAD LED

OFFICES | RETAIL | SCHOOLS | HEALTH CARE | HOSPITALITY

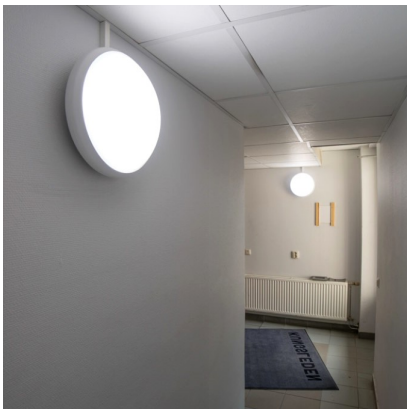

Sturdy and cost-effective, the 2D bulkhead's are a perfect LED lighting solution for a variety of areas, including stairways, walkways, office spaces and garages. LED bulkheads are favoured for any property due to their lower energy consumption, resulting in reduced operating costs.

The 2D Bulkhead offers adjustable colour temperature, a microwave version for further savings and an emergency version.

Features & Functions

- Polycarbonate Diffuser 120° light distribution
- IP65
- IK08
- Microwave Sensor & 3hr maintained emergency version
- CCT adjustable, 3K, 4K, 6K
- 35,000hr lifetime
- Glare Free White Light
- Maintenance Free
- Environmentally Friendly
- Simple installation

Product	2D Bulkhead
Product Code	2D-BLKHD
Supply Voltage	220—240 VAC, PFC = 0.9
Power Rating (Circuit)	15 Watts
Lumens	1800
LED Lifetime	>35,000 hours
Ingress	IP65 IK08
Body Material	Polycarbonate diffuser ABS base
Operating Temperature	-30°C to +50°C Ambient
Light Cooling	Convection passive air flow software
Colour Rendering	CCT - 3000/4000/6000K CRI—>80
Compliance	CE, RoHS 2011/65/EU, EMC 2014/30/EU, LVD 2014/35/EU
Dimensions LxWxH	325 x 325 x 100 (mm)
Weight	1.45kg
Mounting	Wall/Ceilings—Fixings Included
3hr Emergency version available	
Microwave = Motion Detection. 4-7m (100%), 3m (high). Detection angle - 150 degrees (wall), 360 (ceiling)	
MW Settings: Time on - 5 Sec, 30sec, 1 Min, 3min, 5 Min, 10 Min, 20 Min and 30 Min	
Lux Level - 2 Lux, 10 Lux, 25 Lux, 50 Lux or off	